IDURA



DURABLE, ACOUSTICAL, AND COMFORTABLE UNDERLAYMENT

NO.2023-01

DURACOUSTIC

QUICK AND EASY TO INSTALL

INSTALLATION PROCEDURE

1

The subfloor must be structurally sound, flat, clean, and dry. 2

Install
DURACOUSTIC
with black side
down. Seams
must be placed
tightly together
and preferably
taped with
duct tape.

(3)

Install polyethylene foam or fiberglass board along the wall perimeter of the entire subfloor and around any protrusions at the perimeter. The isolation of the floating floor prevents flanking between floors and walls. Tape or tack-glue

the isolation.

4

For gypsum concrete:

When a gypsum concrete overlay is poured, please refer to supplier's instructions. В

For cement boards:

Install two
layers of 1/2"
cement board
perpendicularly
with a 1/4"gap,
and an 8" minimum overlap.
Use 2" fiberglass
tape embedded
in ceramic.

C

For plywood:

The two layers must be glued together using a 1/4" square trowel for full coverage. Leave 1/4" of space all around the perimeter of the floor and fill the gap with acoustical sealant. Always follow the flooring manufacturer's specifications.


Caution:

Using poor quality adhesive, incorrect type, or improper application method can cause installation issues. Please contact Dura Undercushions for installation assistance.



DISCOVER MORE

DURABLE ACOUSTICAL COMFORT

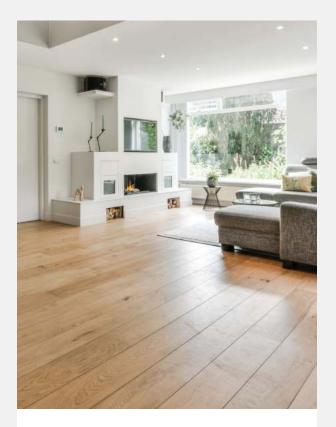



For Engineered Hardwood and Laminated Flooring

YOU NEED:

DURA-SON DURA-SON MB

MULTI-RESILIENT LAYER FLOORING

YOU NEED:

DURACOUSTIC

For Carpets

YOU NEED:

DURACUSHION SUPERDURA PROTECTOR DURALUX


MULTI-RESILIENT LAYER FLOORING

YOU NEED:

DURACOUSTIC

The durability of our products are the solution to all your acoustical needs. They will outlast and maintain their acoustical and comfort qualities throughout their lifetime.



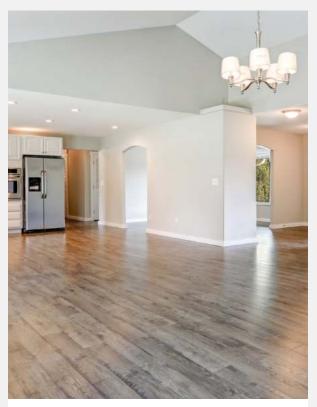

For Ceramics

YOU NEED:

DURAQUIET

MULTI-RESILIENT LAYER FLOORING

YOU NEED:

DURACOUSTIC

For Vinyl

YOU NEED:

DURAQUIET

MULTI-RESILIENT LAYER FLOORING

YOU NEED:

DURACOUSTIC



8525 CHEMIN DELMEADE, MONTREAL QC H4T 1M1

1-800-295-4126

INFO@DURAUNDERCUSHIONS.COM

WWW.DURACUSHION.COM

